


# A-1A-F

## TERMOFUSIBILE RADIALE

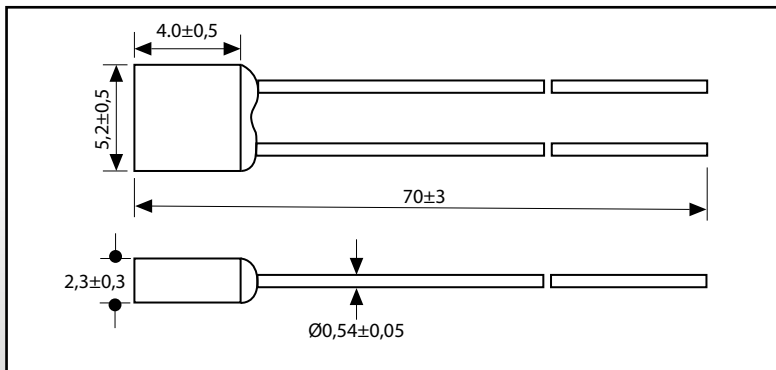

Model	Rated Function Temperature TF	Cutoff temperature	Holding Temperature TH	Maximum Temperature Limit TM	Rating Current IR	Rating Voltage UR
A1-1A-F	102°C	98°C ±2°C	76°C	180°C	1A	250Vac
A2-1A-F	115°C	112°C ±3°C	85°C	180°C	1A	250Vac
A3-1A-F	125°C	120°C ±3°C	97°C	180°C	1A	250Vac
A4-1A-F	130°C	126°C ±2°C	102°C	180°C	1A	250Vac
A5-1A-F	135°C	131°C ±3°C	105°C	180°C	1A	250Vac
A7-1A-F	138°C	135°C ±2°C	108°C	180°C	1A	250Vac
A8-1A-F	150°C	145°C ±3°C	120°C	180°C	1A	250Vac

### APPROVALS

RoHS UL C-UL VDE KTL CCC PSE



**RD**  
Components S.r.l.

Via Bergamo 6 - 20835 Muggiò(MB) ITALY  
Tel. +39 039 2328773 P.IVA 12934630158  
[www.rdcomponents.com](http://www.rdcomponents.com) - [www.rdc-service.it](http://www.rdc-service.it)

